


Cleaning Instructions

Routine maintenance will ensure the very best in filtered water – Recommended every 4 weeks.

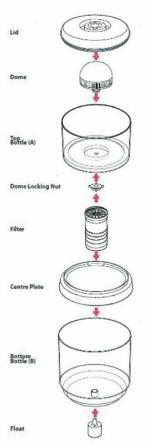

LID - Rinse & wipe clean

DOME FILTER - Unscrew anti-clockwise (Reverse to Tighten)

- Squeeze and remove, white cage like cover.

- Separate White pad from black

- Rinse White Only.

TOP BOTTLE - Rinse & wipe clean

WASHER – Ensure washer is in placed between top bottle and white plate, when re-assembled

CARTRIDGE FILTER - Unscrew from white plate & flush

WHITE PLATE - Rinse & wipe clean

BOTTOM BOTTLE - Rinse & wipe clean

FLOAT VALVE – Unscrew, Rinse & wipe clean rubber stopper & ensure valve moves freely

This process takes approximately 5 minutes & will ensure the very best water quality.



HOW TO CHANGE YOUR FILTER

Included in this mail out to you are the following items that you will need to successfully change your Aussie Water filter.

These items are:

- · One cloth filter made up of two layers, one being white & the other black
- · One large plastic multi layered cartridge filter
- One sticker with a reminder month written on it with your next filter due date
- This letter plus an instruction sheet on how to dismantle your bottle assembly
- · Your receipt for your payment of this filter.

Procedure:

- Follow the instructions as provided on the enclosed care instructions sheet to dismantle your bottle assembly
- Open up the dome section and take out the wagon wheel looking section allowing you to access the cloth filter
- Remove the cloth filter and replace with the new cloth filter with the white side facing upwards
- Place the wagon wheel section back on top of the cloth filter and close the dome back together
- · Unscrew the old filter from the white plate as pictured and discard
- · Remove the new filter cartridge from the box and run under cold water for several minutes
- · This process removes the excess carbon dust from the charcoal sections of the filters
- To speed the process up hold the filter in one hand and then cup your other hand over the top of the new filter and smack the top of the filter 4 times and place it under the water again and repeat
- This procedure forces the water through the filter faster and therefore flushes the excess carbon dust through quicker
- · Continue this process until the water comings out of the bottom of the filter is clear
- Now screw the new filter firmly (not too tight) back on to the white plate being careful not to cross thread the filter
- Follow the remainder of the instructions page to put your bottle section back together again
- Place your new "Due Date" sticker on the front of your machine just above the digital display to help you to remember when your next filter is due.